

LIBRA OVAL 6635

66" x 35" x 27" (FREESTANDING)

Libra's symmetrical lines and universal look will be a perfect fit in any style bathroom. The identical soft slope of the interior walls brings comfort and relaxation for one or two bathers.



PRODUCT NO.

MODEL	TMU	TUB
Freestanding	BLIHOF00T-XX	BLIHOF00N-XX

THERMOMASSEUR (TMU)	
Hydro-thermo massage • Air jet system	\$
Jets	34
1 heated backrest	Included
MiaPlus® Control* (not installed)	Included
BU-Touch Control Application	Included
Geysair®	Included
AromaCloud®	N/A
Illuzio Chromatherapy BCHRO6	\$
2 nd heated backrest (WTS-1 zone) BSHB	\$


TUB	
Soaker	\$
Illuzio Chromatherapy BCHRO6	\$
WarmTouchShell® BWTS	\$
DOT control	Included with therapy
2 nd WarmTouchShell® BWTS2	\$


FEATURES			
Installation type	Freestanding		
No. of bathers	2	Imp. gallons	46
US gallons	56	Armrests	2

INTEGRATED WASTE & OVERFLOW BOVERINI-XX	
White 01, Chrome 07, Brushed Nickel 09, Polished Nickel 10, Matte White with UltraVelour finish 32	Installed & Included

STANDARD COLOR	
 White 01	Included

OPTIONS (UPCHARGE APPLICABLE)

COLOR	
 Black / White 66	\$
FINISH	
UltraVelour Matte Finish (white only) BVEL3	\$
INTEGRATED WASTE & OVERFLOW BOVERINI-XX	
Matte Black 19, Satin Brass 18	\$
ISLAND TUB DRAIN™**	
Island Tub Drain™ BSLDD	\$
Cast Iron Island Tub Drain™ BSLDDCI	\$
IF REQUIRED BY CONSTRUCTION CODE	
Brass waste & overflow kit BDRCOB	\$
Brass waste kit BDRCB	\$

 Don't forget to specify the **finish of the integrated waste & overflow**.
 * Control must be wall-mounted. Faucets must be freestanding or wall-mounted.
 ** An Island Tub Drain™ is recommended when there is **no access under the bath**.

TOTAL PRICE	\$
--------------------	----

FOR THE INSTALLER

SCAN TO VIEW INSTALLATION VIDEO (3:20 MIN)






LIBRA OVAL 6635 (FREESTANDING)



INSTALLATION

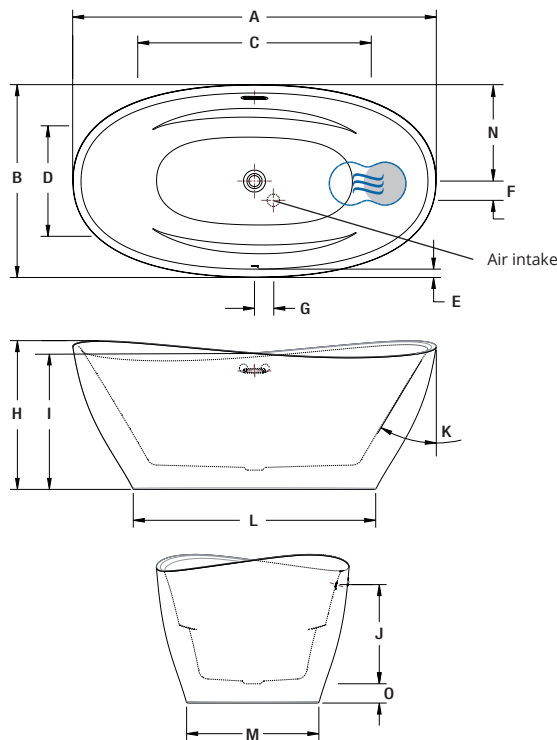

LETTER	DESCRIPTION	MEASURE
A	Total length	66"
B	Total width	35"
C	Bathing well length	42 3/8"
D	Bathing well width	23 3/16"
E	Deck width	1 1/2"
F	Center waste to air intake (side)	3 1/2"
G	Center waste to air intake (front)	3 1/2"
H	Maximum total height	27"
I	Minimum total height	24"
J	Maximum water level	18"
K	Slope of backrests	31°
L	Base length	44"
M	Base width	18"
N	The outer edge to center of waste	17 1/2"
O	Height from drain to floor	3 1/2"

- Indicates heated backrest (TMU)
- ☁ Indicates WarmTouchShell® position (TUB)

TECHNICAL SPECIFICATIONS

Hot water supply required	The hot water supply should be 70% or more of the bath's total water capacity.
Turbine	Turbine is remotely installed; access to the pump must be at least 18" x 22". Standard connection is 20 A, 120 V, 60 hz , dedicated line with a Ground-Fault Circuit Interrupter (GFCI). For any additional option, a second line is needed 15 A, 120 V, 60 hz , dedicated line with a GFCI. Air vent necessary: 2" x 4" minimum.
Others	<ul style="list-style-type: none"> - The Geysair is located on the same side as the heated backrest. It must NOT be relocated. It must be connected to the hot water supply and be accessible (provide access). - Faucet must be freestanding or wall-mounted. - The turbine must be remotely installed. - Controls cannot be installed on the deck of the bath.

Our products must be installed by certified professionals only and according to our Owner's Manual as well as federal, provincial/state and local building codes and regulations (www.bainultra.com/documentation/documentation).

Cutting template	# 90000086
Approx. shipping weight	230 lbs
Turbine power	550 W
Air heater	600 W
WARRANTY	
Controls-LED-Geysair*	5 years
Bath & turbine*	20 years

* Some restrictions apply | www.bainultra.com/warranty

The specifications shown indicate the outer edge dimension and the inside bathing capacity dimension measured at air jets' height. The manufacturer accepts a 1/4" [0.64 cm] variance. There are variations on each product and specifications are subject to change as we improve upon our product as required. The dimensions needed for site preparation and structure building will differ. BainUltra® assumes no responsibility for preparatory work done prior to the product being on site.